

QINGDAO TGOOD ELECTRIC CO.,LTD.

0532-89083000 Email: tgood@tgood.cn

ADD: No.336,Songling Road, Laoshan District, Qingdao


TJTYB20250918



PREFABRICATED SUBSTATION

A NEW GENERATION OF DIGITAL ONE-STOP INTEGRATED SERVICES SOLUTION FOR ALL SCENARIOS

www.qdtgood.com

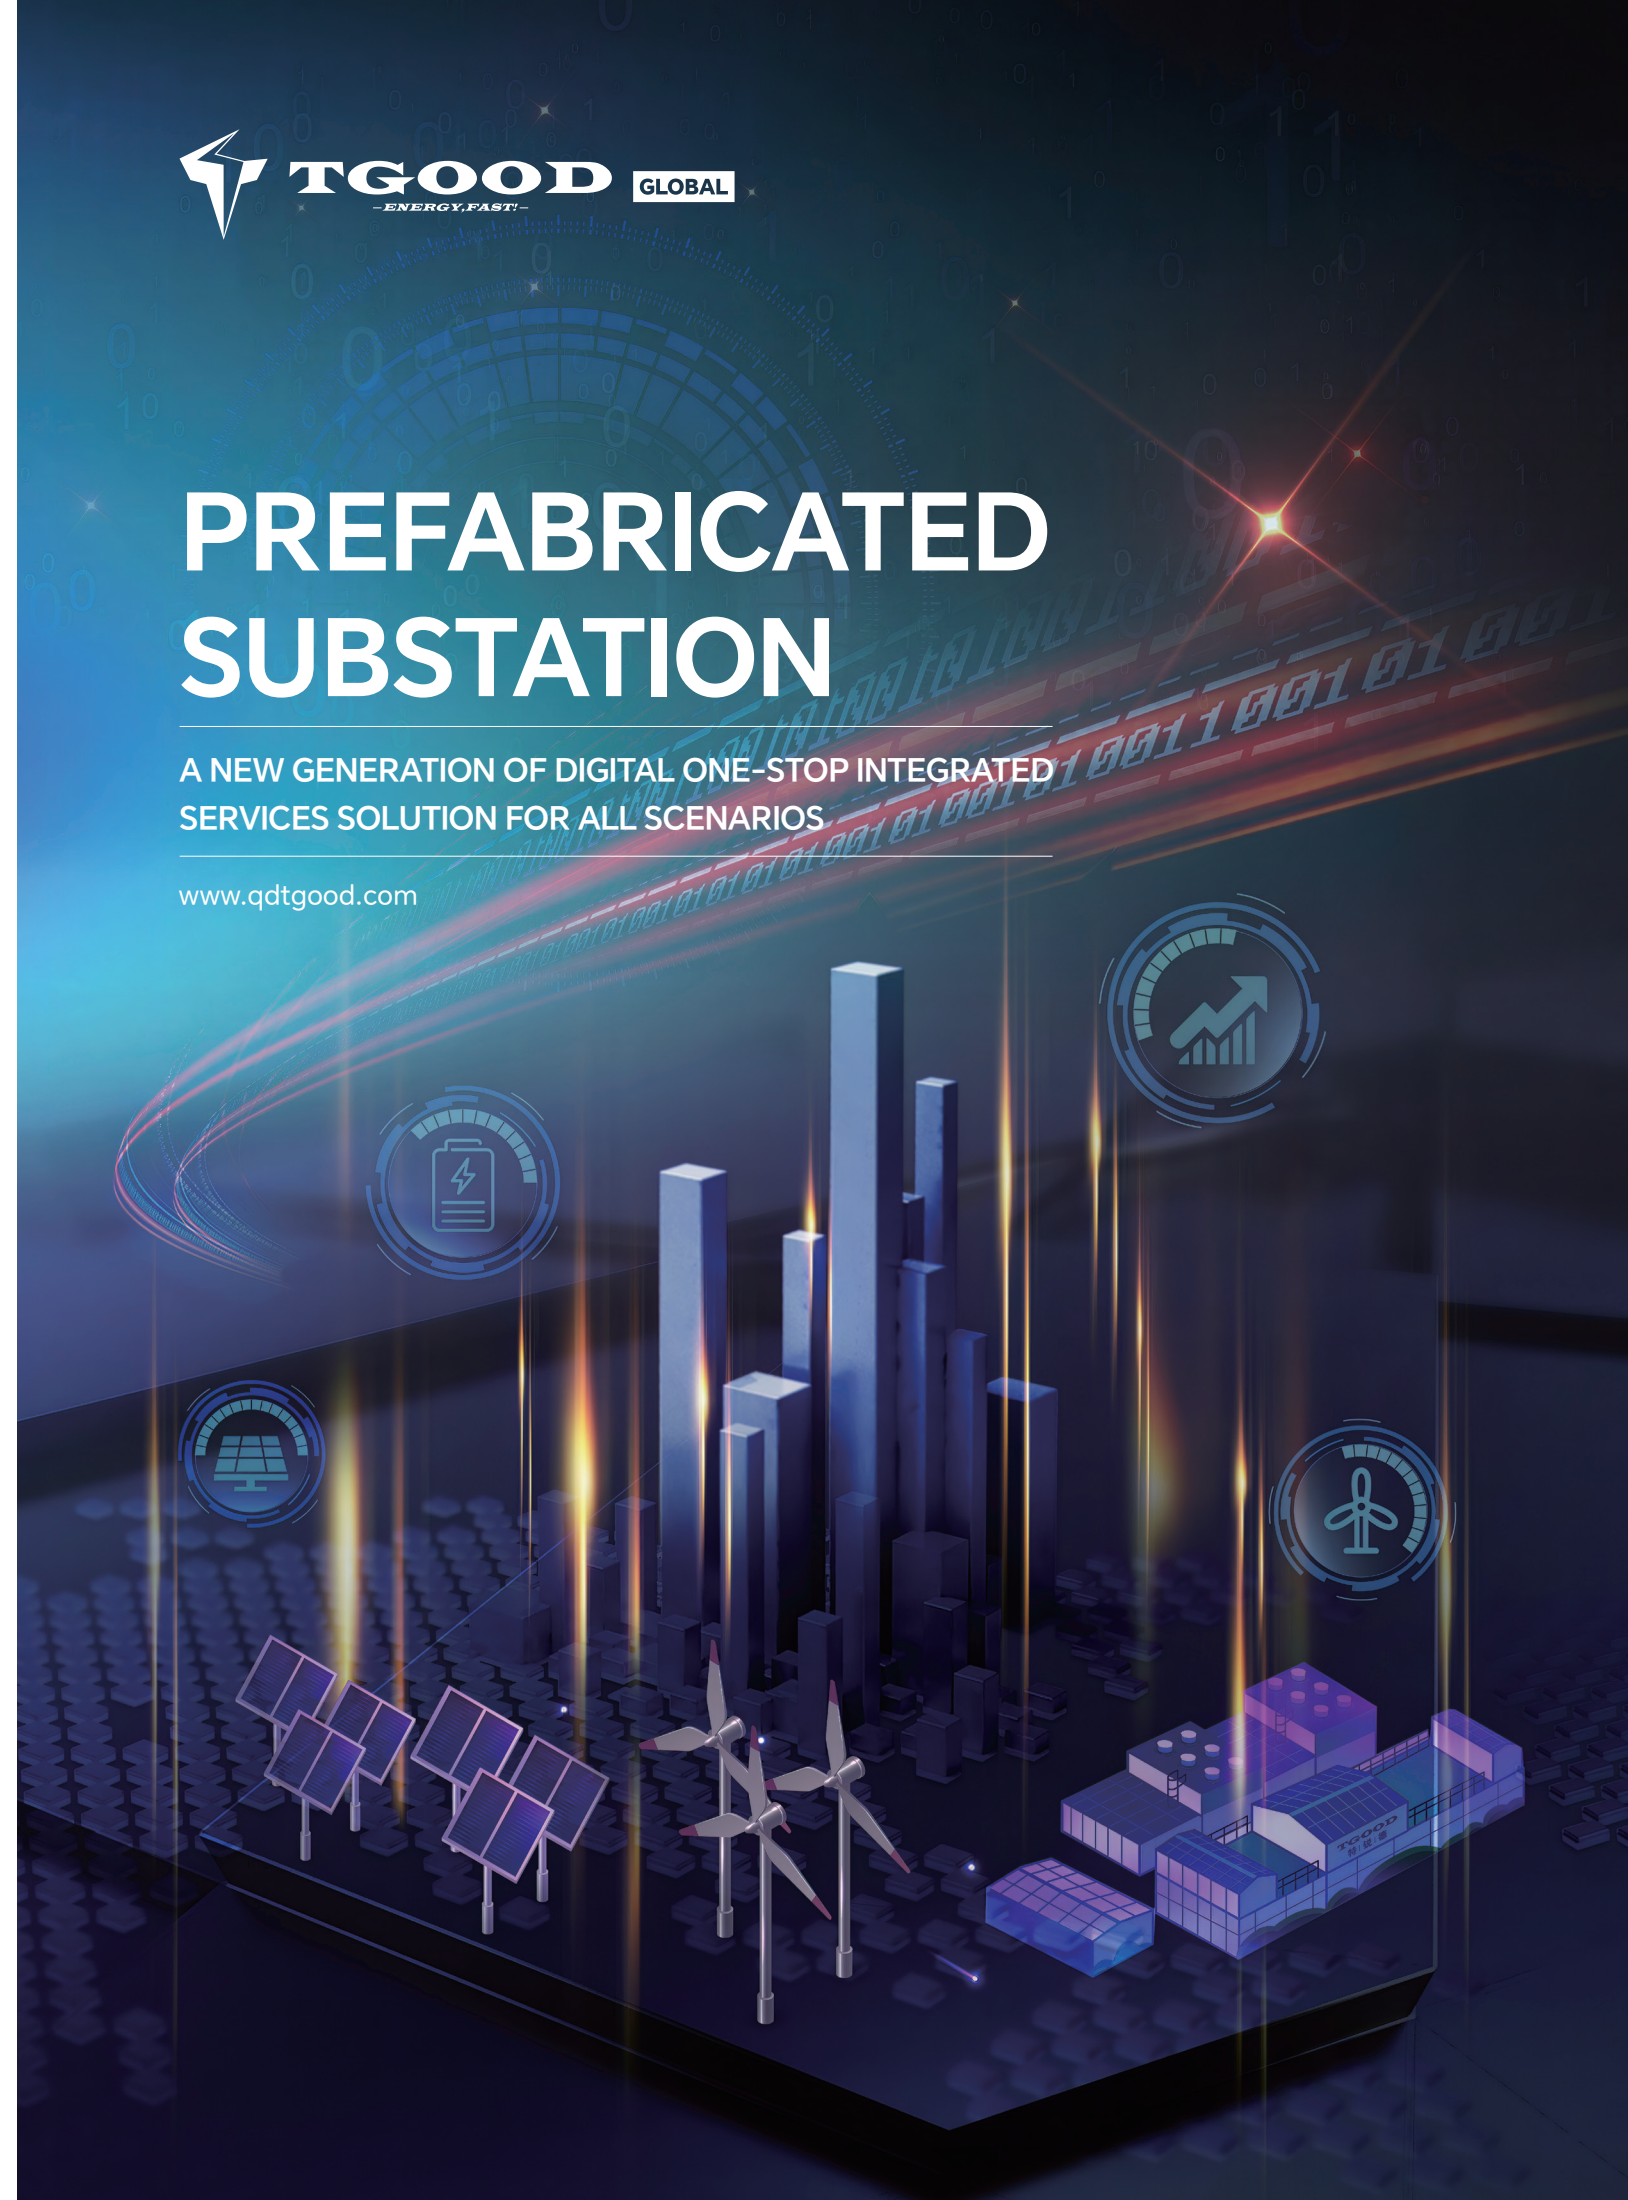

COMPANY INTRODUCTION

TGOOD Electric (300001)

Est. 2004 | Listed 2009

Power Equipment & EV Charging Networks

2024 Performance

Revenue: **CNY 15.37B**

Net Profit: **CNY 917M**

Total Assets: **CNY 25.01B**

Industry Leadership

Railway & Power Market Leader

National "Manufacturing Champion"

EV Charging Dominance

807K Public Charging Terminals

484K DC Terminals

30% Terminal Share

2004 ~ 2025

Specializing in integrated R&D and manufacturing of prefabricated substation products

N0.1

China's largest R&D and manufacturing base for enclosed power equipment

Champion Enterprise

Won the title of the eighth batch of national manufacturing single champion enterprises issued by the Ministry of Industry and Information Technology

Top 500

Selected as one of China's top 500 private enterprises for two consecutive years

Three times

TGOOD's team building was included in the teaching case library of Harvard University and Tsinghua University three times

260+

Subsidiaries

10000

Staff

780k (m²)

Factory Area

10000+

Prefabricated substation integration solutions



STRATEGY OF ONE BODY WITH TWO WINES



Ultra-advanced Zero-Carbon Digital Building
+ High-speed Vertical Parking

TGOOD

特 | 锐 | 德


Smart Manufacturing
+ Integrated Services



Charging Network + Microgrid
+ Energy Storage Network

Target

- Strengthen the position as the world's leading brand in prefabricated power equipment.
- Build a charging network ecological operator that the government trusts and customers are satisfied with, becoming the strongest and largest in China.
- Create a digital ultra-high-speed three-dimensional parking system based on ultra-grade zero-carbon buildings.



Steady growth

14.602billion CNY

Operating income in 2023, an increase of 25.56% over the same period

50+

Covering more than 50 countries and regions around the world

300001

In 2009, it was listed as the first stock on the Growth Enterprise Market, stock code 300001

Leading Technology

High-tech enterprise

National Key High-tech Enterprise

20 years of technology accumulation

Integrated design, R&D and production experience of intelligent prefabricated transformer products

100+

Application Scenario

1500+


Patents, copyrights and other intellectual property rights

10+


Industry coverage

30+

National, provincial and municipal key projects

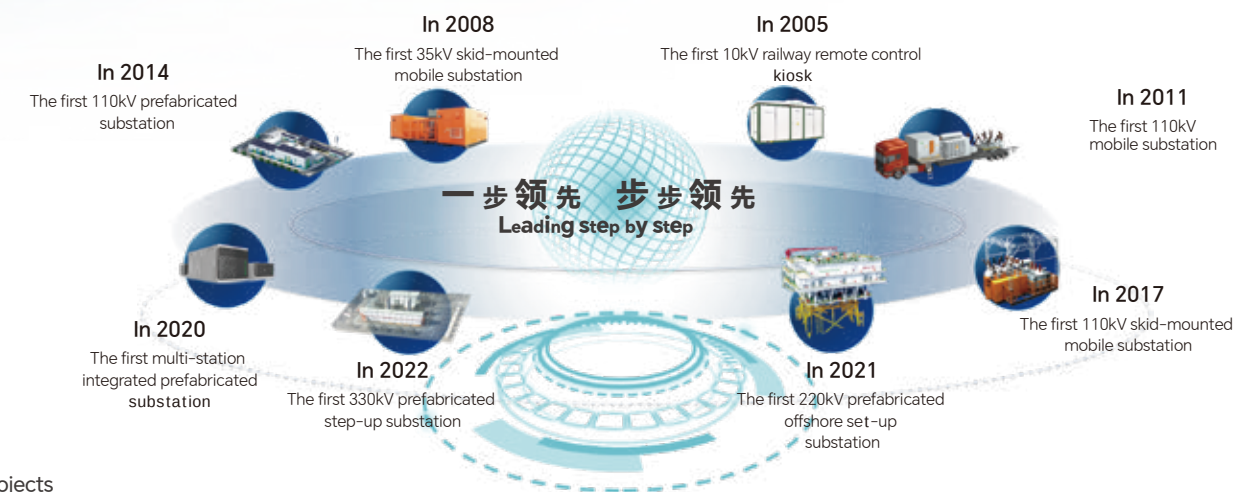

INTELLIGENT MANUFACTURING

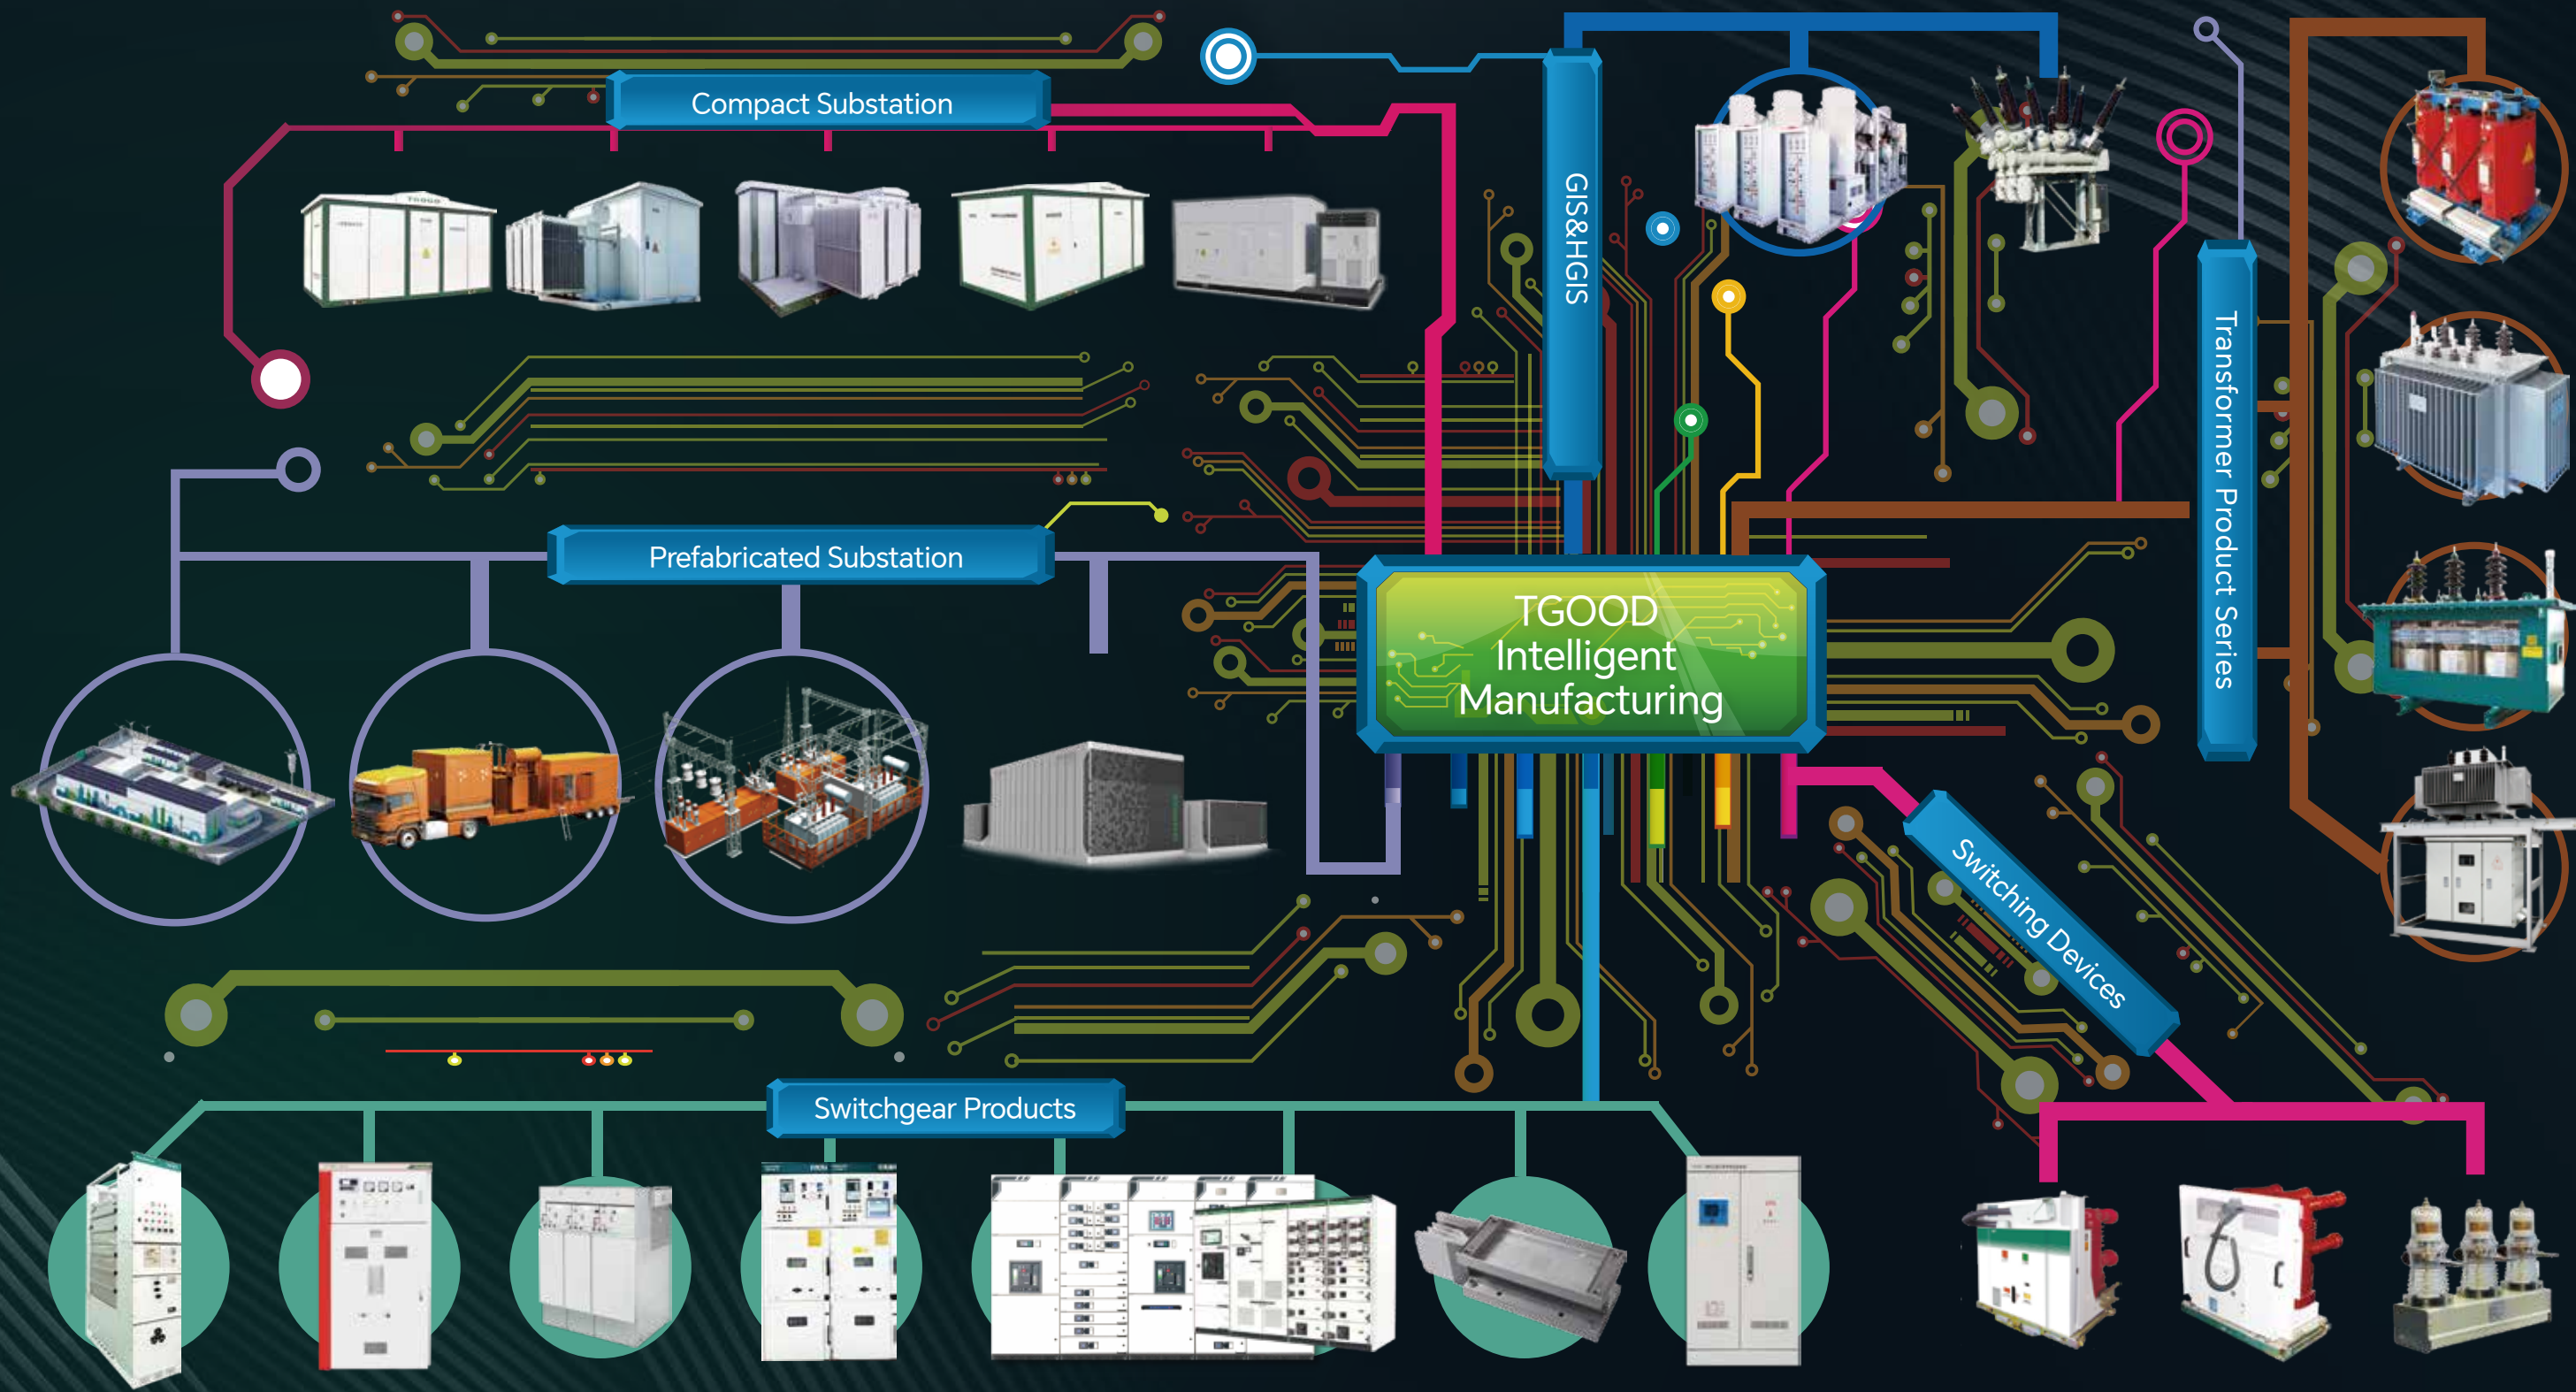

TEST REPORT



Impact resistance report

Cyclic ageing report

Fire resistance report



Electromagnetic radiation report

Noise test report

Performance test report

CONDITIONS OF OPERATING ENVIRONMENT

Variable	Name	Unit	Description
Outdoor Ambient Temperature	Maximum Daily Temperature	°C	≤55*
	Minimum Daily Temperature	°C	≥-45**
	Average Temperature of the Hottest Month	°C	45
Ambient humidity	Daily mean relative humidity		95% and below
	Monthly mean relative humidity		90% and below
Altitude of the installation site		m	1,000 and below (please specifically state if exceeding 1,000)
Protection level			IP54
Impact resistance		J	20
Design Wind Velocity		km/h	170
Seismic intensity			8 (0.2g)
Pollution Class	Equivalent Salt Deposit Density (ESDD)	mg/cm ²	0.55(Coastal Areas)/0.3 (Inland Areas)
	Non-soluble Sediment Density (NSDD)	mg/cm ²	5.00 (Coastal Areas and Inland Areas)

Note: * more than 55°C is optional **lower than -45°C is optional

BUILDING MODE

Standardized design | Factory production | Prefabricated construction

The new generation of prefabricated substations follows the concept of "standardized design, factory production, and prefabricated construction", which has changed the construction model of traditional substations and realized the transformation of substations from "building" to "purchasing".

- Prefabricated substation enclosure replace buildings, reducing the amount of civil construction
- Maximize factory prefabrication to reduce installation workload
- Transport modularization, suitable for transport under complex road conditions
- Mechanized assembly construction, convenient construction

Civil engineering work
prefabricated substation
manufacturing

Delivery
transportation

Prefabricated
construction

Acceptance and
commissioning

DEEP PREFABRICATION

Build ➔ Buy

To build a prefabricated substation only need

100 days




- Modular assembly substation construction, complete construction technology
- Mechanized on-site construction reduces labor input
- 4-5 days to achieve the transformation of the substation from scratch
- High website construction efficiency and fast equipment operation

PREFABRICATED SUBSTATION SOLUTION

Highest cost-effectiveness | Highest reusability

Previous solutions can be replicated, allowing typical and standard designs to be quickly advanced, greatly shortening design time

Technical experience can be continued, allowing the best process route and design quality to be selected, greatly improving the design quality

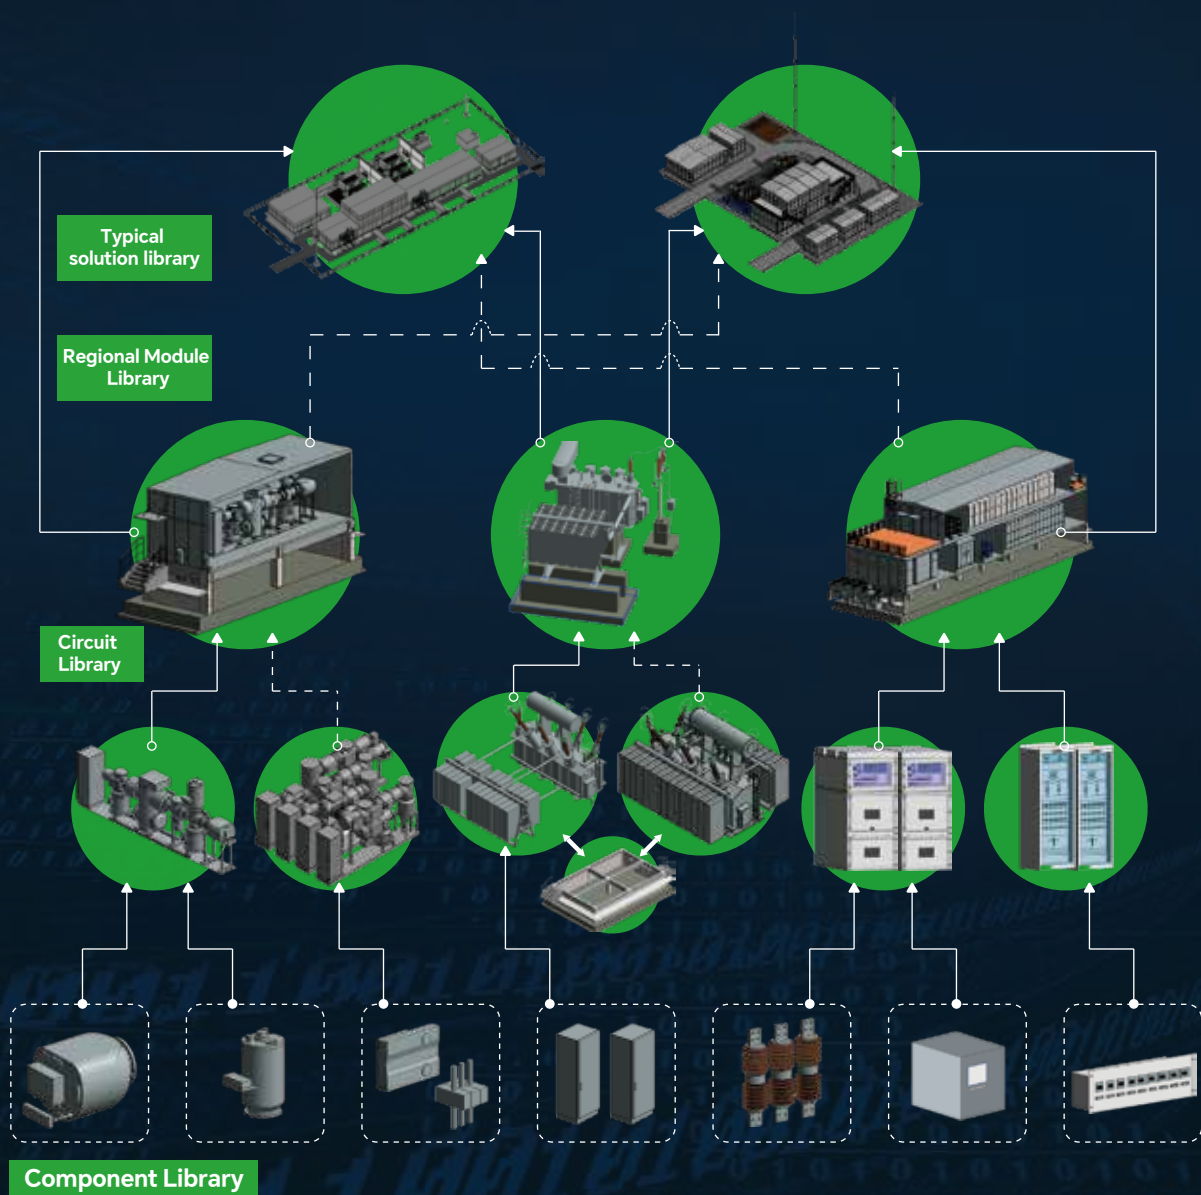


MODULAR DESIGN

Component modularity | Design modularity | Production modularity

The standard library is constructed based on the characteristics of the 3 D model, and the equipment and enclosure are modularly constructed based on the principle of interface standardization.

Use standardized and modular 3D models to manage space design and reduce the site footprint



Prefabricated production with standardized and modular 3D models shortens the construction period of the entire substation

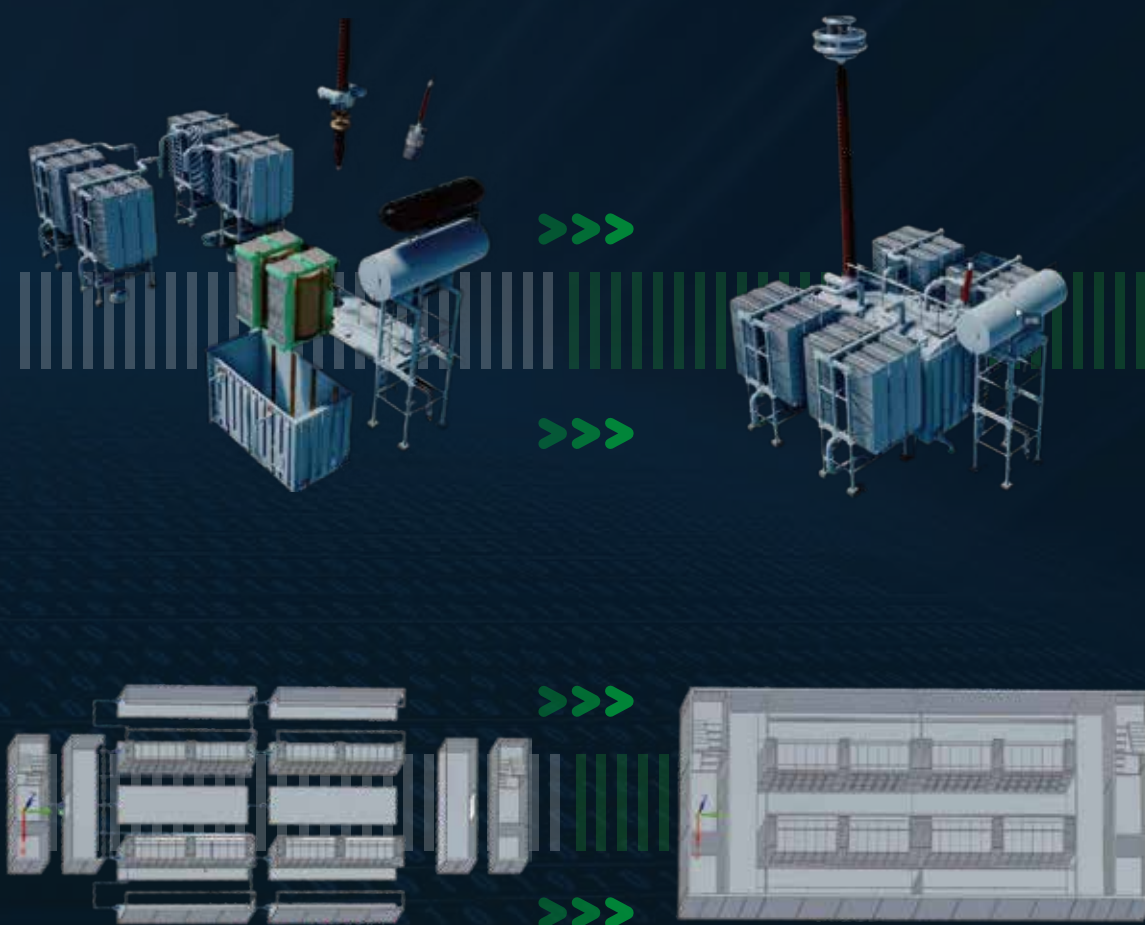

FORWARD COLLABORATIVE DESIGN


Design Visualization | Reduce error rate | Multi-disciplinary collaboration

- 3D visualization, complex systems and structural layouts can be clearly displayed, facilitating optimized design decisions.
- Working in a unified model effectively reduces design errors and conflicts, and improves design quality and efficiency.

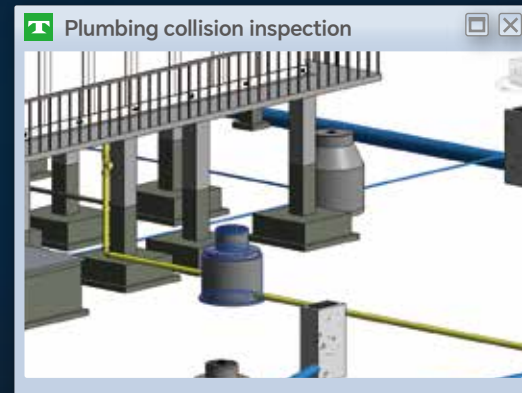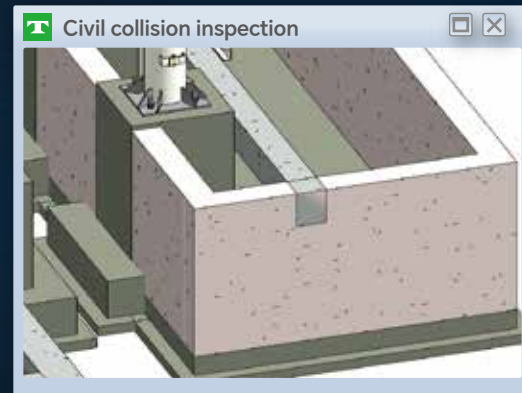

COMPUTER ASSISTED

Collision Detection | One-click image output

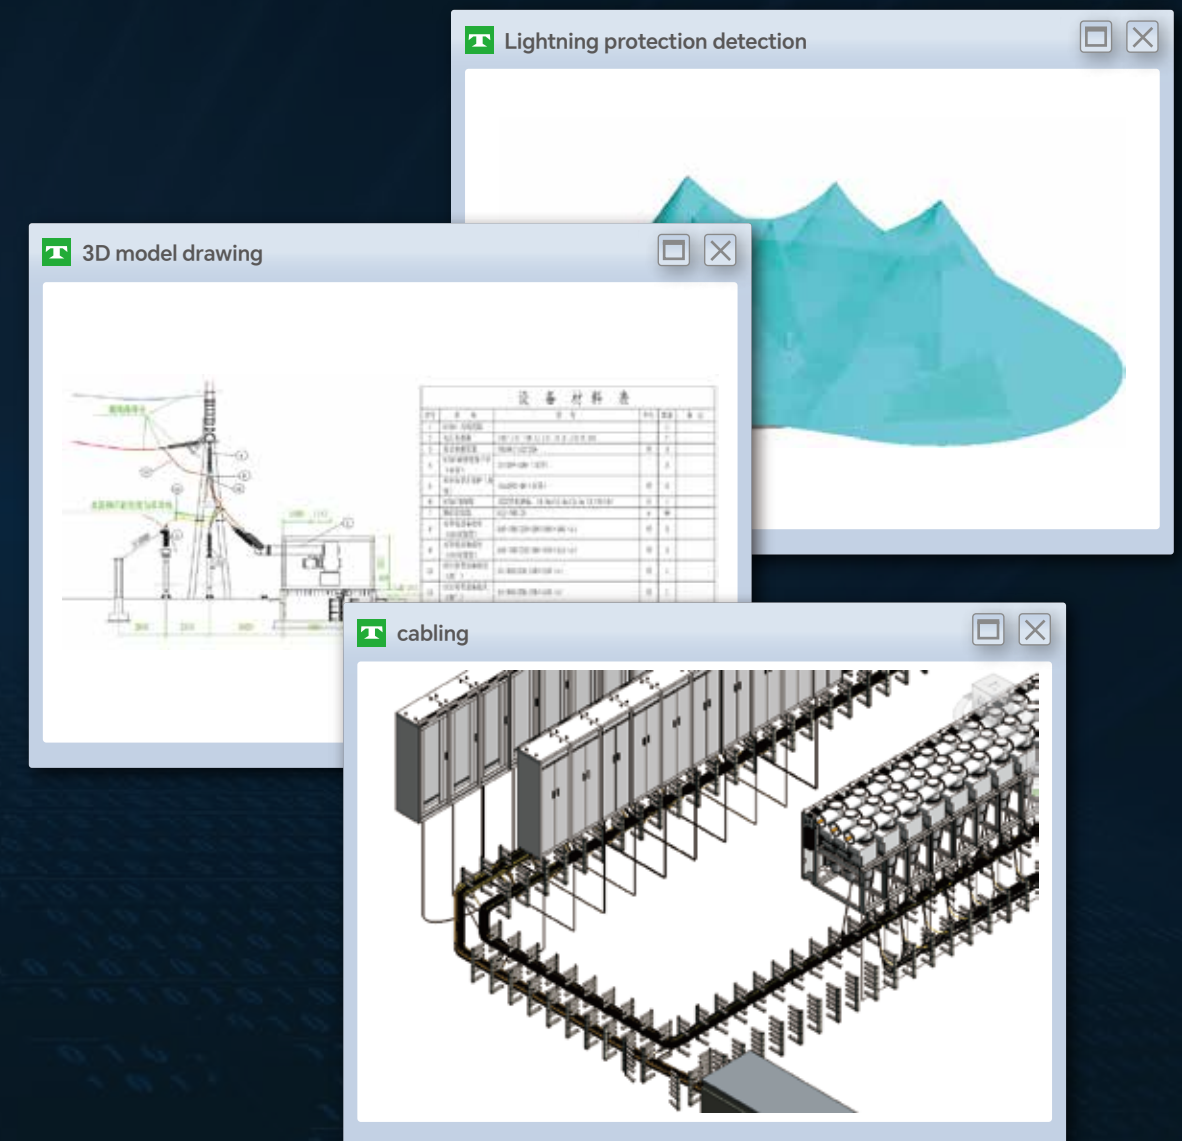

- Computer-aided concealed engineering, lightning protection and grounding, electrical safety clearance verification, automatic cable laying, collision inspection, etc.
- Directly cut and draw the 3D model, and fully export the whole substation equipment list, engineering drawings, installation materials and other related information

CHARACTERISTICS OF PREFABRICATED E-HOUSE

HIGH WEATHER RESISTANCE APPLICATION OF PREFABRICATED E-HOUSE

Structural Strength | Earthquake Resistance

The main structure complies with the design service life of the building structure and is 50 years

- The world's first coastal 220kV modular prefabricated substation
- The world's first 220kV prefabricated offshore substation



Finite element simulation software ABAQUS analysis meets the seismic intensity of 9 degrees


- Calculation report on seismic performance of prefabricated substation for Protection and Control Prefabricated E-house
- Calculation report on seismic performance of prefabricated switchgear E-house
- Seismic test of prefabricated E-house for modular substation




Institute of Engineering Mechanics,
China Earthquake Administration

Suzhou Electric Science
Research Institute

Seismic test of prefabricated E-house for modular substation

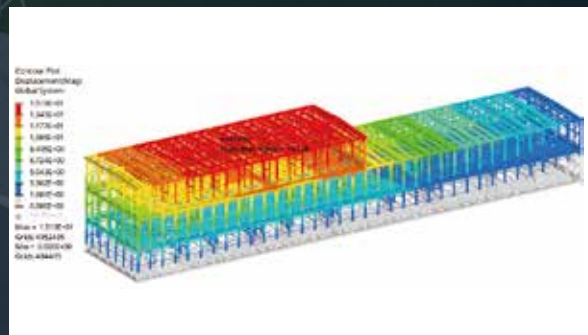

Widthwise earthquake acceleration

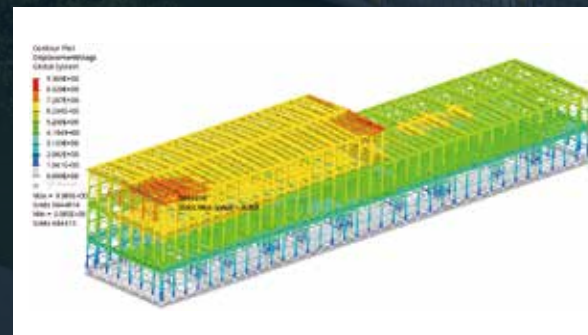

Lengthwise seismic acceleration

Thermal Insulation | Sealing And Waterproof Performance

DOOR PANEL AND COLUMN SPLICING STRUCTURE



- The overall wall thickness is about 120mm, which has good thermal insulation effect
- Application temperature range: maximum (55°C) ~ minimum (-55°C)

ROOF JOINT PROTECTION SYSTEM



- The joints are treated with mechanical structure and sealing materials to ensure double security of waterproof sealing.

CHARACTERISTICS OF PREFABRICATED E-HOUSE

ANTI CORROSION TECHNOLOGY
APPLICABLE TO MULTIPLE REGIONS

Service life up to 50 years



C5 anti-corrosion solution (coastal areas)



C3 Anti-corrosion Solution (Inland Areas)

ISO 12944

Meets corrosion protection requirements

50years

Meet 50-year service life

Advanced spraying line

Imported from Switzerland and the United States

Good effect

High production efficiency and good spraying effect

CUSTOMIZABLE APPEARANCE AND OVERALL INTEGRATION

The prefabricated **E-house** is the first of its kind in China. It is constantly updated and iterated to lead the industry innovation. The enclosure can be customized according to different customer requirements.

- Self-developed and self-produced, unified appearance, not limited by production capacity, etc.
- The enclosure, equipment and auxiliary systems are integrated as a whole, with a unified style



ENSURING THE SERVICE LIFE OF PREFABRICATED E-HOUSE

Fire resistant insulation | Impact resistance



Fire resistance test of special wall panels for prefabricated substation

- The outer double-layer steel plate is filled with insulation material to form a whole with strong impact resistance.
- Effectively prevent the impact of external fire sources, conventionally reach Class E second-level fire resistance for 2h, and the transformer compartment reaches Class C first-level fire resistance for 3h.
- Fire protection distance is implemented in accordance with GB50229



Purification board
Insulation core material

Rock wool



Fireproof board
insulation core material


Aluminum silicate wool



CHARACTERISTICS OF PREFABRICATED E-HOUSE

01 GIS PREFABRICATED E-HOUSE

According to different usage scenarios and requirements, GIS prefabricated E-house can be divided into inline integrated GIS prefabricated E-house and conventional GIS prefabricated E-house.

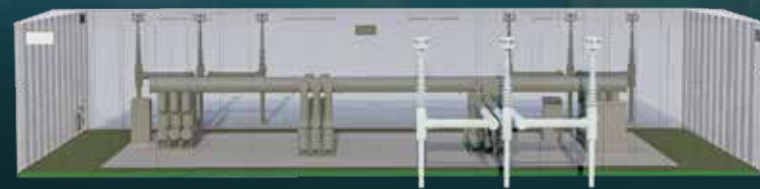


Conventional GIS
prefabricated substation

Inline
GIS prefabricated E-house




02 TRANSFORMER PREFABRICATED E-HOUSE

Integrated transformer prefabricated E-house/
split transformer prefabricated E-house
can be selected according to the use scenario requirements

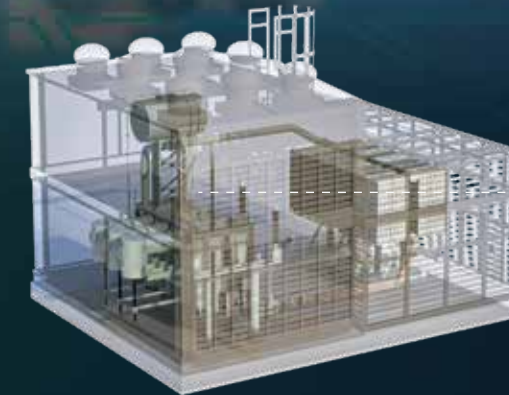

Split transformer compartment

Integrated transformer compartment

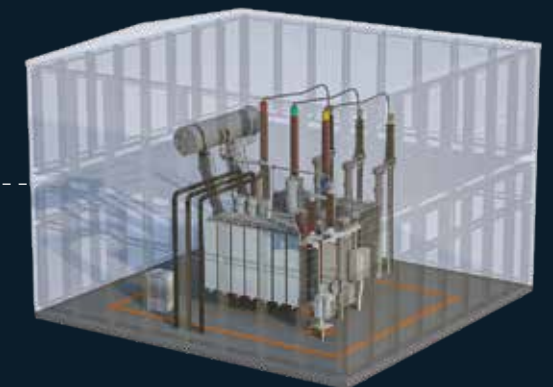

Features of prefabricated E-house



Three-layer shock absorption technology

Applied between GIS equipment
and enclosure to reduce
vibration transmission during GIS
operation



Three-layer shock absorption technology

Applied between GIS equipment
and enclosure to reduce
vibration transmission during GIS
operation



Maintenance-free

The enclosure is maintenance-free
and the space meets the specifications.
Maintenance and inspection are more
convenient



Configuring SF6 detection

The enclosure is equipped
with SF6 detection alarm
and automatic ventilation
system



Earthquake and wind resistance

Integrated design, high integrated
installation strength, meets earthquake
and wind resistance requirements



Multiple connection modes

Can realize various connection forms
such as cable, overhead,
oil-gas casing, etc.

Features of prefabricated E-house



Flexible application

The grille and fire-wall type
wall panels are flexible and
meet the dual requirements of
heat dissipation and fire protection



Noise reduction

The substation use sound
barrier technology
to reduce noise
for the transformer



Capacity optional

The main transformer
has flexible connection con-
figuration and a wide range
of optional capacities

03 SWITCHGEAR PREFABRICATED E-HOUSE



The E-house is prefabricated, and the switchgear selection and installation form are flexible. Different equipment can be integrated into the enclosure. The internal operation passageway in front of the substation and the maintenance passageway space behind the switchgear meet the relevant national standards, making operation and maintenance more convenient.



Safe and reliable

The enclosure is dustproof, anti-condensation and corrosion-resistant. Equipped with an internal arc pressure relief channel to ensure safety.



substation integration

high structural strength
Flexible substation selection,
factory integration



Flexible layout

The switchgear in the enclosure can be designed with single-row or double-row layout to meet different scenarios.

04 PROTECTION and CONTROL PREFABRICATED E-HOUSE



The substation automation system integrates a variety of protection and control equipment such as integrated automation, metering protection and other related supporting facilities. Some equipment can be wired and debugged in the factory, which greatly reduces the on-site workload and improves the power transmission efficiency of the substation.



Flexible layout

The panel can be arranged in double-row, triple-row, multiple-row layout, etc.



Plug&Play Solution

It can realize the solution of prefabricated optical and electrical cables, with cable interlayer.



Meet O&M requirements

The main control room can be set up according to needs to meet the on-duty operation and maintenance needs of operation and maintenance personnel.

05 MULTIFUNCTIONAL PREFABRICATED E-HOUSE

► Prefabricated E-house for auxiliary equipment

Capacitor modules, SVG modules, grounding transformer modules, etc. can be integrated and installed in the factory to meet the requirements of distribution transportation, and can be flexibly combined into compartments according to different needs.




AUXILIARY EQUIPMENT



◀ Prefabricated living and office E-house

Fixed modules such as prefabricated living room and tool rooms are decorated according to home decoration standards, taking into account the functionality and usability of the living room. Humanized decoration design provides a good working and living environment for substation operation and maintenance personnel on duty

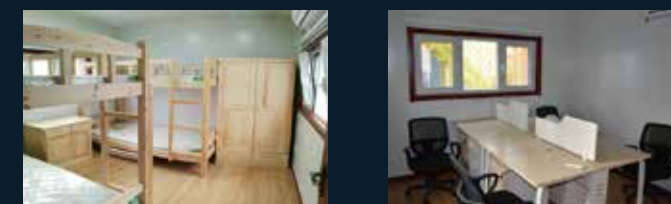



POWER SIDE APPLICATION SCENARIOS

Assist China's key power generation groups

Provide integrated solutions for 1000+ projects



Flexible plan



Energy conservation
and environmental protection



Compact
Structure




Reliability



CHARACTERISTICS OF PREFABRICATED SUBSTATION

► CEIC Ningdong Photovoltaic Set-up Station Project

Major Equipment	System Scale	Equipment Configuration Plan
330kV system	Single busbar configuration with 1 Incomer and 3 Feeders	GIS composite electrical appliances
Main transformer	3×360MVA	Outdoor integrated transformer
35kV system	Single busbar configuration with 67 Feeders	TGP inflatable cabinet is used in the prefabricated E-house
SVG system	6×±15Mvar	Arrange in Prefabricated E-house
Parallel capacitor system	6×±15Mvar	Parallel capacitors are used in the prefabricated E-house
Secondary system	129 panels with 22 data center substations inside	The prefabricated E-house adopts a complete set of equipment

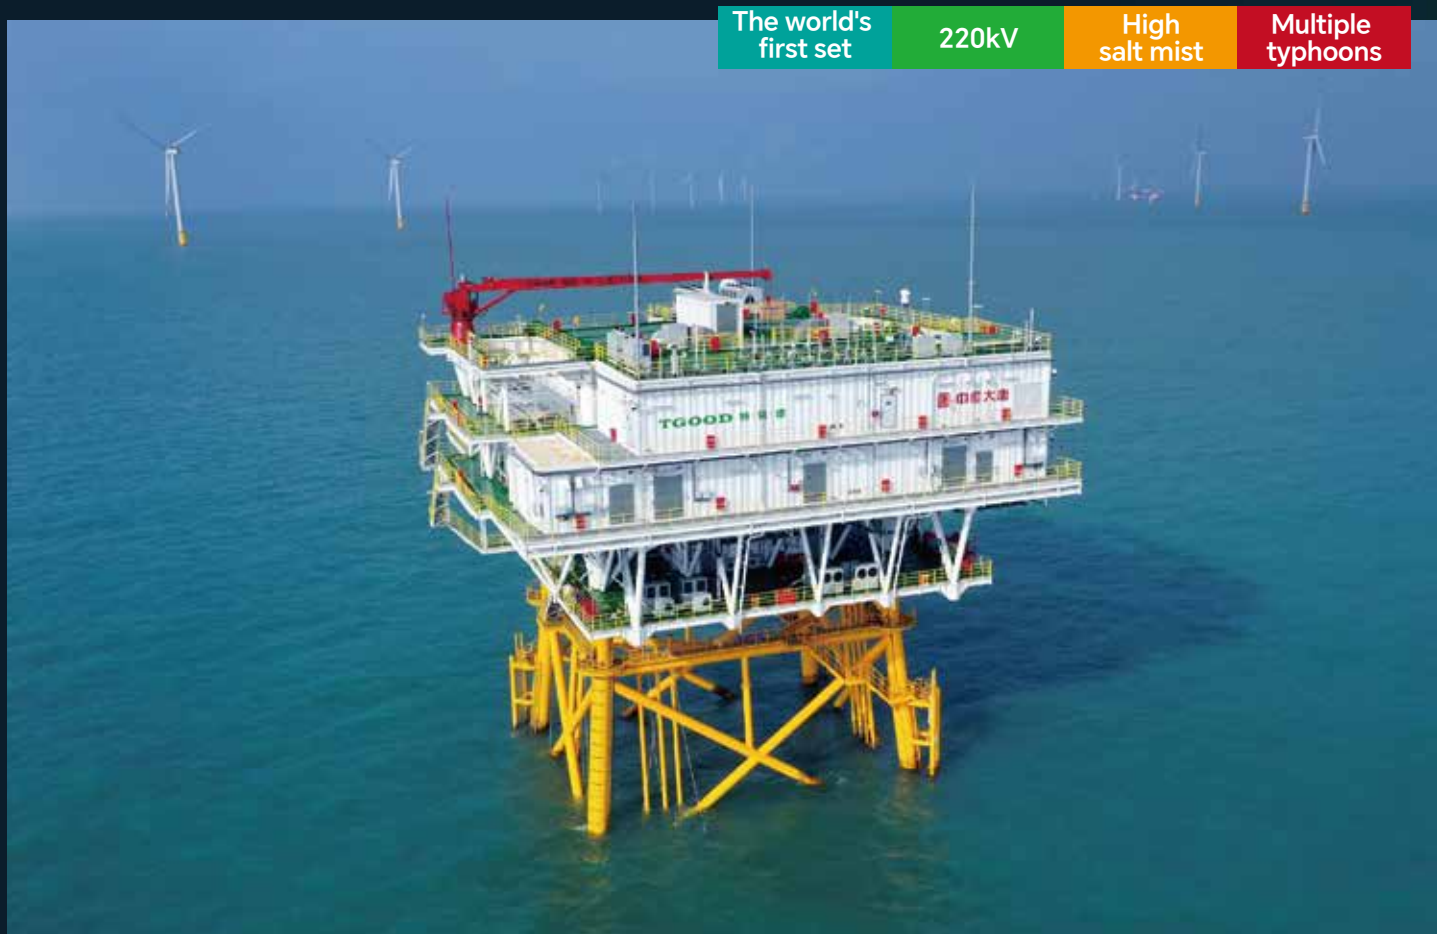

The world's first set 220kV High salt mist Multiple typhoons



220kV High Altitude Complex terrain

CHARACTERISTICS OF PREFABRICATED SUBSTATION

CHARACTERISTICS OF PREFABRICATED SUBSTATION

► Datang Nan'ao Lemen Offshore Wind Power Project

► SPIC Lingchuan Wind Power Set-up Substation Project

Major equipment	System Scale	Equipment Configuration Plan
220kV system	2 Line-Transformer Connection	Outdoor GIS
Main transformer	2×150MVA	Indoor split type transformer
35kV system	Single busbar configuration with 9 Feeders	TGP40.5 is used in the prefabricated E-house
Earthing Transformer System	2 sets of NER	The prefabricated E-house adopts a complete set of equipment

Major equipment	System Scale	Equipment configuration plan
220kV system	Single busbar configuration with 1 Incomer and 3 Feeders	Outdoor GIS
Main transformer	3×100MVA	Outdoor integrated transformer
35kV system	Single busbar segmented configuration with 9 Feeders	KYN61 is used in the prefabricated E-house
Reactive power compensation system	3×28 Mvar	Prefabricated E-house adopts directly-mounted SVG equipment
Earthing Transformer System	NER	NER is used in prefabricated E-house



POWER GRID SIDE APPLICATION SCENARIOS

Provide integrated solutions for building a new type of power system

On the power grid side, focusing on the problems and challenges faced by power grid company in the construction and renovation of substations and the construction of smart distribution networks for new power systems, TGOOD focuses on the construction of new power systems, leverages its system integration technology advantages, innovates product forms and connotations, and provides customers with full scenario and full lifecycle system integration solutions.

- 
New construction of substation
- 
Substation expansion
- 
Substation technical renovation
- 
Low voltage management
- 
Substation load transition
- 
Smart power distribution

POWER GRID SIDE APPLICATION SCENARIOS



New construction of substation



Substation expansion



Substation technical renovation



Low voltage management



Substation load transition



Smart power distribution

CLASSIC CASE OF THE ENERGY STORAGE SIDE

The grid side provides integrated solutions
for building a new type of power system



Modular Intelligent Prefabricated Substation

PREFABRICATED SMART POWER DISTRIBUTION



Assist the rapid implementation of new power systems on the distribution network side

With full load capacity factory prefabrication and integrated installation of primary and secondary equipment as the core, advanced prefabrication E-house integration key technology as the foundation, and the construction concept of "fast, small, precise, economical, and flexible", we aim to create a new generation of prefabricated smart power distribution rooms that are "strong, reliable, resource efficient, environment tally friendly, fast, efficient, green, and low-carbon".

CUSTOMER VALUE

Compared to the traditional construction mode of power distribution rooms, prefabricated smart power distribution rooms achieve "one-stop packaging construction" for factories, point-to-point distribution transportation, on-site mechanized construction, modular assembly, and ready for operation upon delivery:

F

Deep factory prefabrication, reduces construction period by 60%

S

Reasonable layout, saving land compared to traditional distribution rooms by 20-50%.

P

Diverse appearance and image designs, highly integrated with the surrounding environment.

E

One stop responsibility system, complete station delivery.

F

Flexible layout and equipment selection; Full scene coverage

E

New materials, new technologies, low carbon, environmentally friendly.

APPLICATION SCENARIOS

The construction, renovation, expansion, and upgrading of distribution rooms of industrial parks, public buildings, residential areas, charging and swapping stations, highways, ports, distributed photovoltaics, and other scenarios can all be applied.



LOAD SIDE APPLICATION SCENARIOS

✔ Chip industry



✔ Data Center Industry



✔ Rail Transit Industry



✔ Energy storage industry



✔ Photovoltaic manufacturing industry



✔ Lithium battery industry



✔ Automotive Manufacturing Industry



✔ Industry Park



✔ Tourism and Hotel




✔ Steel Industry



✔ Petrochemical industry



✔ Airport Industry

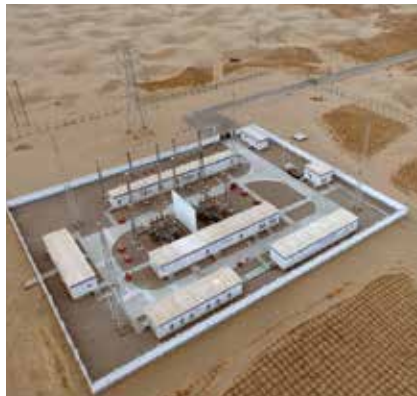

✔ Oil Industry



✔ Coal Industry

TGOOD TYPICAL GLOBAL CASE

ENERGY FAST!



Power Grid-Afirca Fluhoj Renovation

TGOOD First 110/35kV Prefabricated Substation in South Africa



Power Grid-Central Asia Bugri Distribution

TGOOD First act as EPC 110/10kV Project in Overseas



Power Grid-Columbia grid reconstruction

TGOOD First 132kV Mobile Trailer in South America



Oil & Gas PROJECT
SIEMENS & TGOOD Indonesia Prefabricated Substation



MINING PROJECT
SWISS ABB & TGOOD KAZ Mineral Skid Substation



SOLAR PROJECT
Kazakhstan 110/22kV Prefabricated Substation



MINING PROJECT
Central Asian Kumtor Gold 110kV Skid Substation







SINGAPORE LINDE PREFABRICATED SUBSTATION

STANDARD: EN 1993 SERIES\AISC 360


- The design of the E-house structure follow the EN1993 series or AISC 360.
- Professional simulation software simulates real scenes and calculation.
- The structural strength meets the requirement of earthquake resistance, snow load, wind resistance, etc.

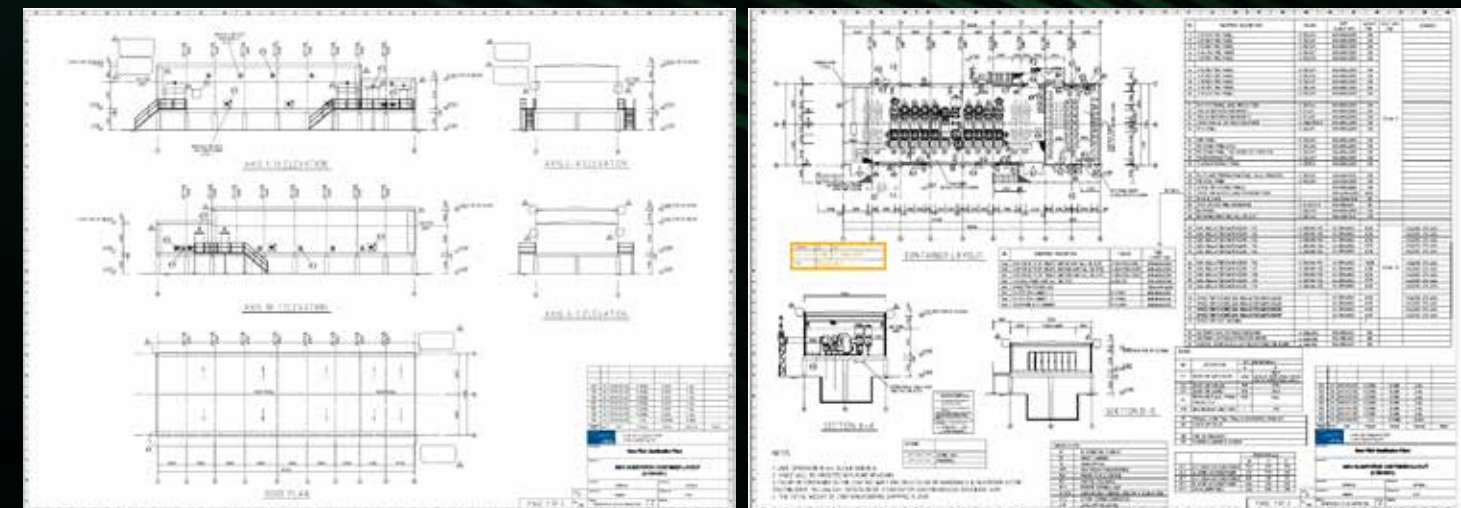

Drawings

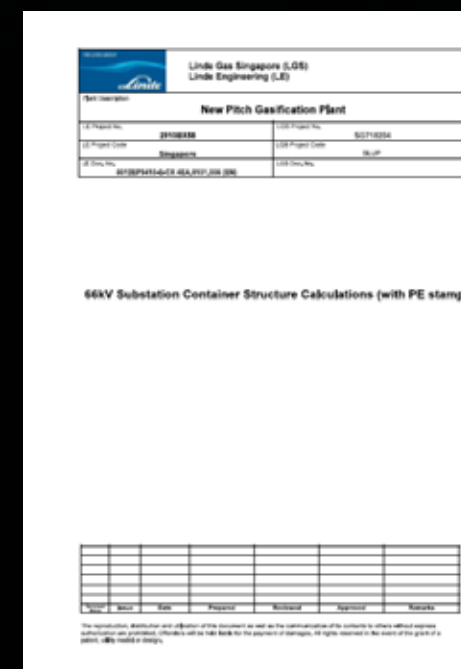

ETABS

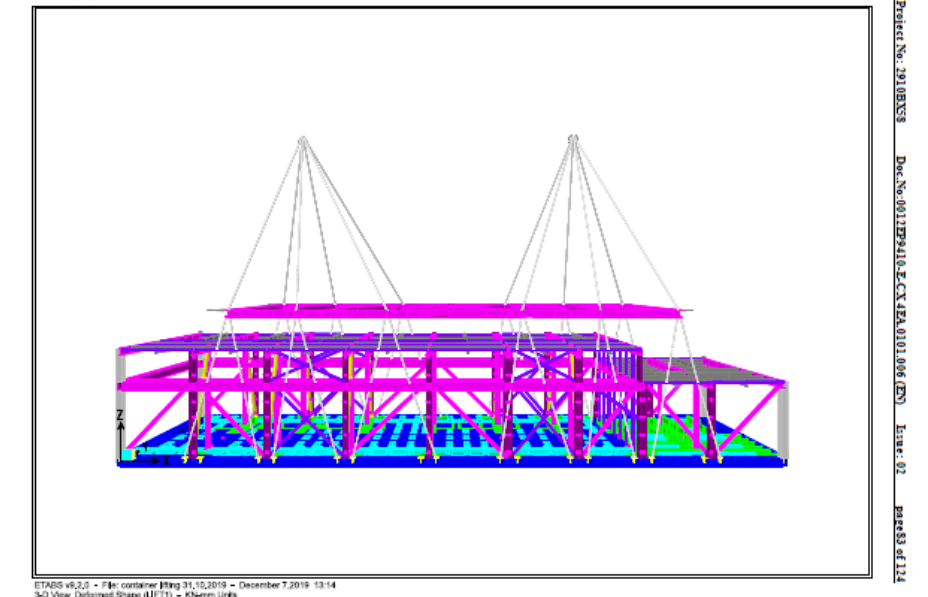








Certificates



MONGOLIA MAK PREFABRICATED SUBSTATION

STANDARD: EN 1993 SERIES/AISC 360

- The design of the E-house structure follow the EN1993 series or AISC 360.
- Professional simulation software simulates real scenes and calculation.
- The structural strength meets the requirement of earthquake resistance, snow load, wind resistance, etc.

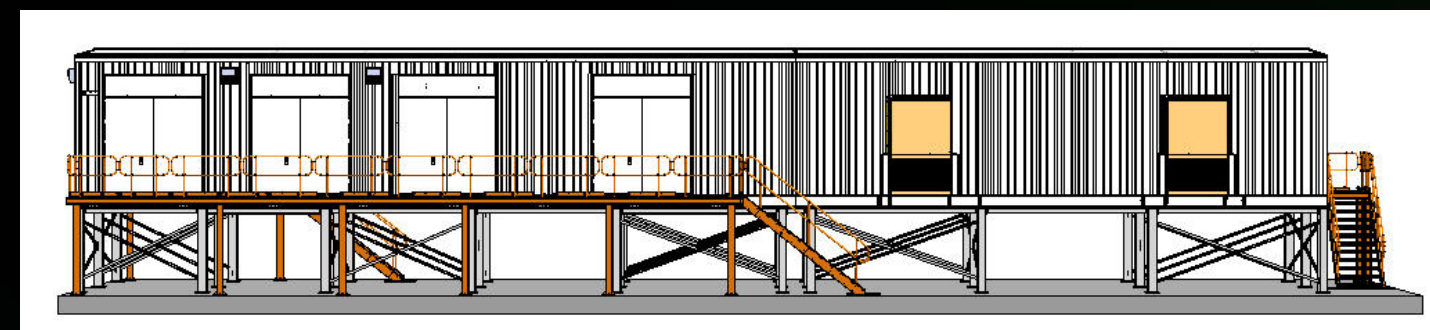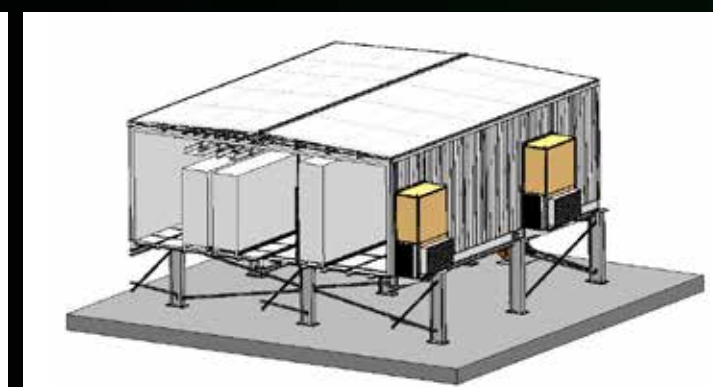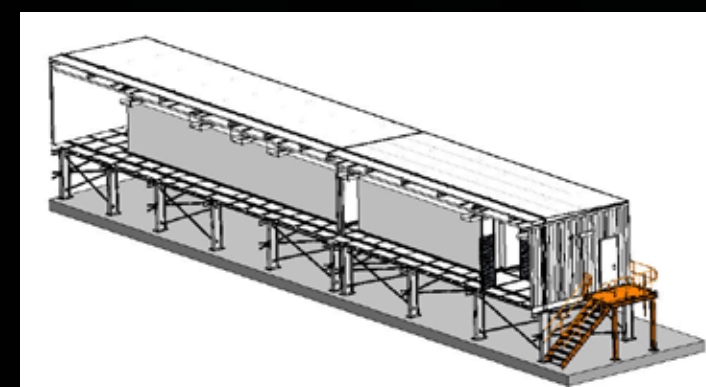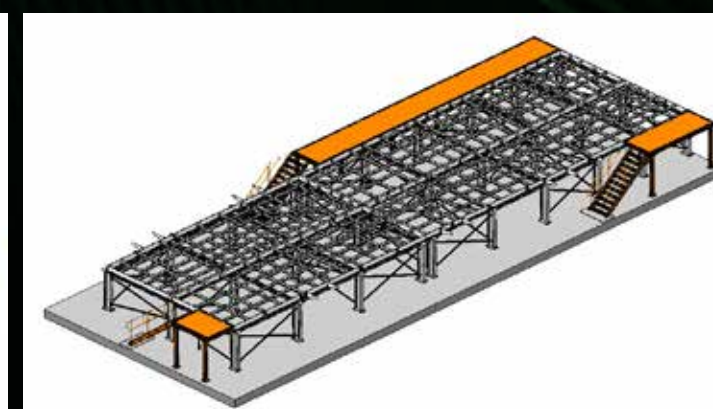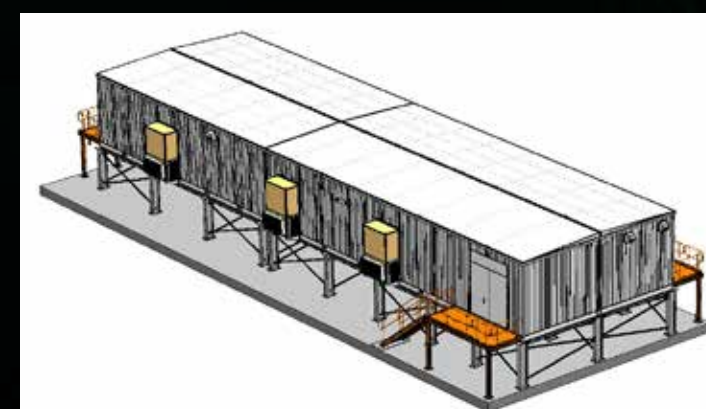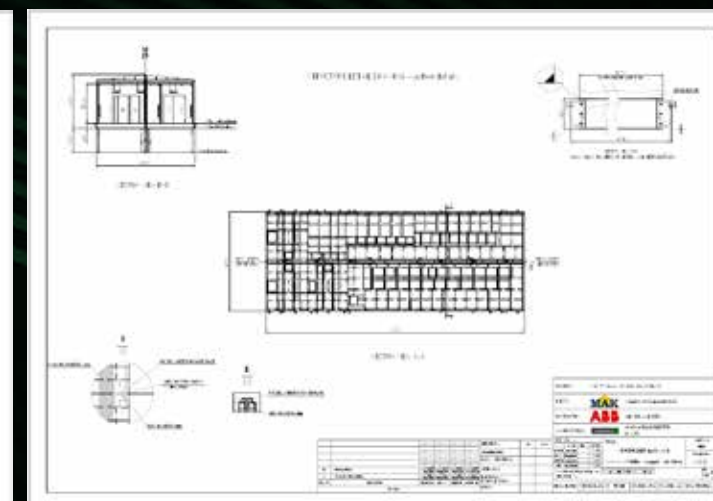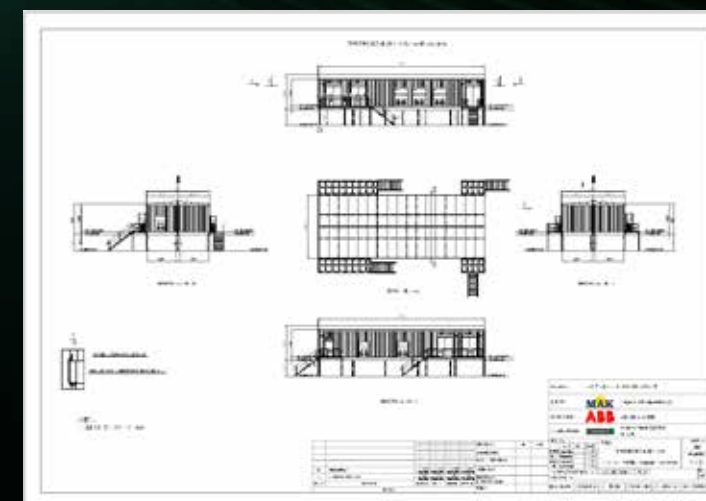

Drawings







CHINA 220/35KV OFF-SHORE PREFABRICATED SUBSTATION

STANDARD:
EN 1993 SERIES\AISC 360

- The design of the E-house structure follow the EN1993 series or AISC 360.
- Professional simulation software simulates real scenes and calculation.
- The structural strength meets the requirement of earthquake resistance, snow load, wind resistance, etc.



Drawings

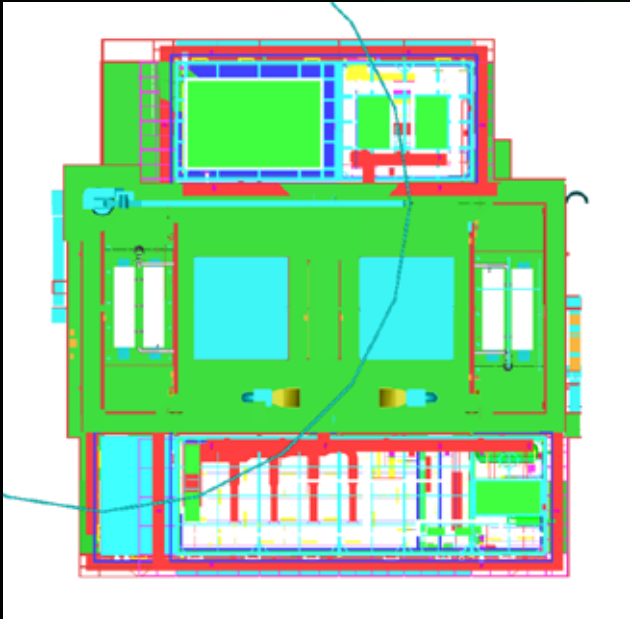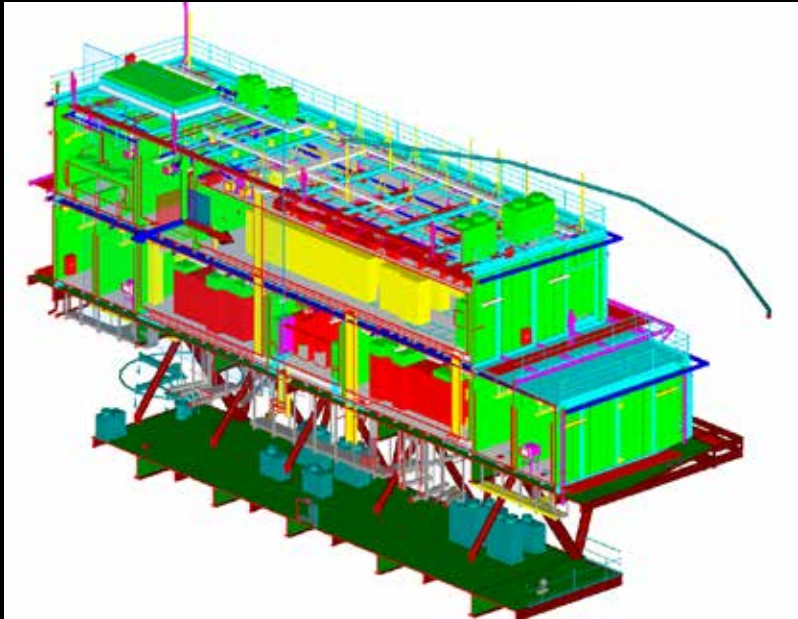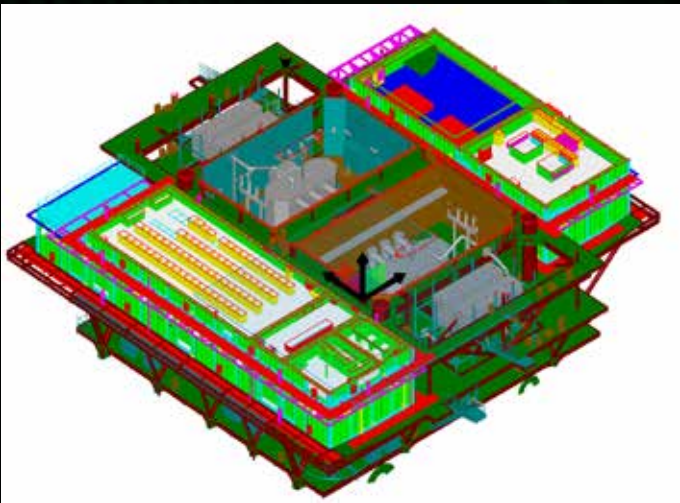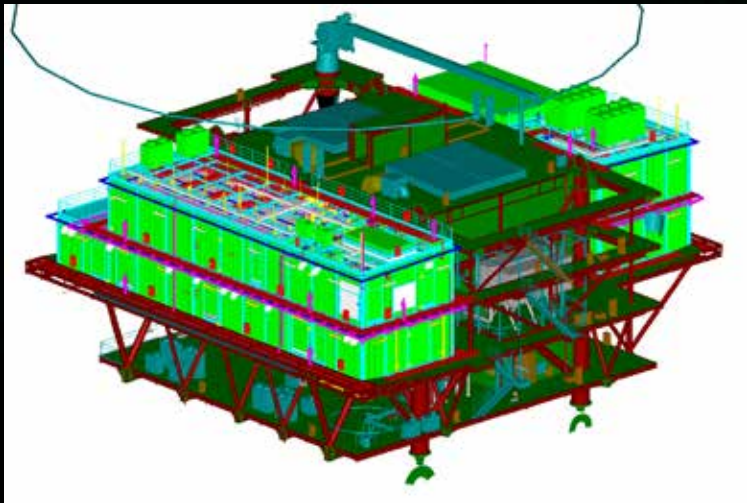

3D Rendering